

# iGLO LED Slim Panels - 2x4, 50W

ENVIRONMENTALLY FRIENDLY, ENERGY EFFICIENT

iGLOLED

IGLOLED.NET




## Features

- UL, DLC Certificate
- 4000K/5000K CCT
- Design for 50,000hr lifetime with 5 year warranty
- Dimmable on 0-10V dimmers.
- No flickering, Even and Soft lighting
- Uniform light
- Dustproof
- Easy for installation

## Applications

Widely used in Offices, Schools, Hospitals, Hotels, Shopping Centers, etc.

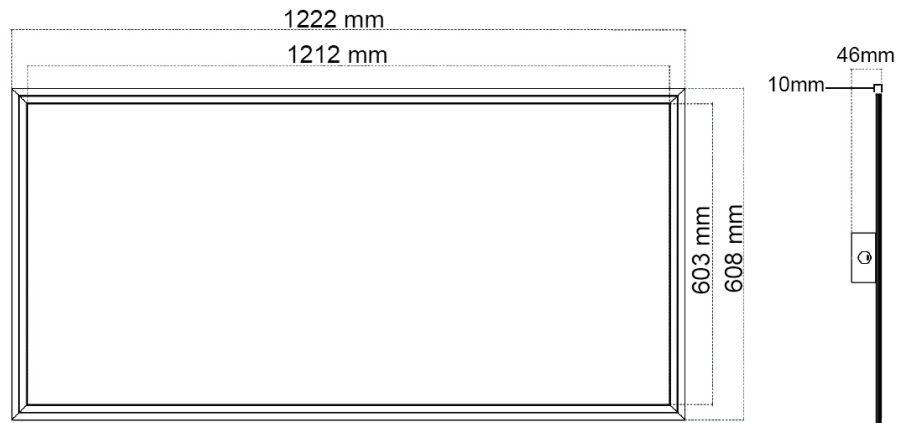

## PRODUCT SPECIFICATIONS

### 3000K

<b>iGLO LED Panel Series:</b>	<b>GL50W2X4TOR3000KUDX</b>
Wattage:	50W
Lumens:	5076.7 LM
CCT:	3000K
Input Voltage:	AC 100-277V 50/60 Hz
Power Factor:	>0.9
Efficacy:	103.78 lm/w
CRI:	>80
THD:	12.56%
Dimmable:	Yes, 0-10V
Dimensions:	2x4 ft, 603*1213 mm
Lifespan:	>50,000 Hrs
Beam Angle:	120°
Certificates:	FCC, ETL, UL
Warranty:	5 years

### 4000K

<b>iGLO LED Panel Series:</b>	<b>GL50W2X4TOR4000KUDX</b>
Wattage:	50W
Lumens:	5312 LM
CCT:	4000K
Input Voltage:	AC 100-277V 50/60 Hz
Power Factor:	>0.9
Efficacy:	107.88 lm/w
CRI:	>80
THD:	12.46%
Dimmable:	Yes, 0-10V
Dimensions:	2x4 ft, 603*1213 mm
Lifespan:	>50,000 Hrs
Beam Angle:	120°
Certificates:	FCC, ETL, UL, DLC
Warranty:	5 years

## PRODUCT SPECIFICATIONS

### 5000K

<b>iGLO LED Panel Series:</b>	<b>GL50W2X4TOR5000KUDX</b>
Wattage:	50W
Lumens:	5430 LM
CCT:	5000K
Input Voltage:	AC 100-277V 50/60 Hz
Power Factor:	>0.9
Efficacy:	109.57 lm/w
CRI:	>80
THD:	14.71%
Dimmable:	Yes, 0-10V
Dimensions:	2x4 ft, 603*1213 mm
Lifespan:	>50,000 Hrs
Beam Angle:	120°
Certificates:	FCC, ETL, UL, DLC
Warranty:	5 years

Box Size	Qty/Carton	Gross Weight	Net Weight
1265*655*112 mm	2	17.5 kg/CTN	13.8 kg/PCS