

# iGLO LED Slim Panels - 2x4, 72W

ENVIRONMENTALLY FRIENDLY, ENERGY EFFICIENT

iGLOLED

IGLOLED.NET



RoHS




## Features

- UL, DLC, RoHS Certificate
- 2700K-5000K CCT
- Design for 50,000hr lifetime with 5 year warranty
- Dimmable
- Instant Startup, soft light, no glare, no noise, no strobe,
- Uniform light
- Easy for installation

## Applications

Widely used in Offices, Schools, Hospitals, Hotels, Shopping Centers, etc.

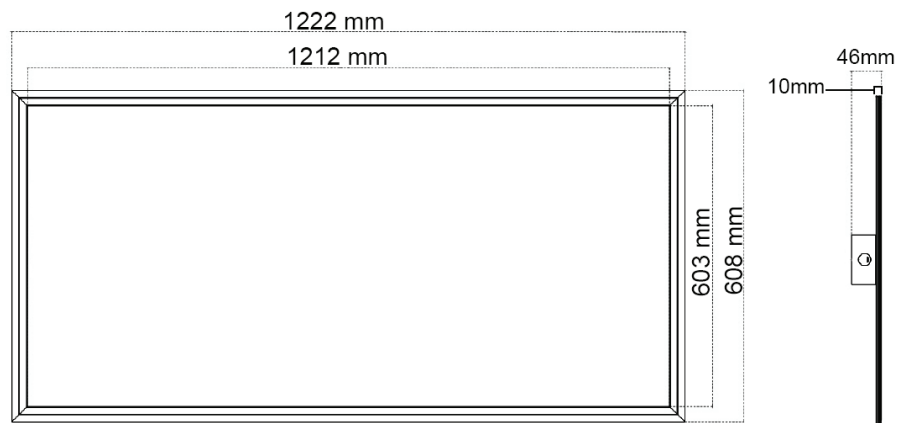

## PRODUCT SPECIFICATIONS

### 2700K

<b>iGLO LED Panel Series:</b>	<b>GL72W2X4JI2700KUDX</b>
Wattage:	72W
Lumens:	7011.5 LM
CCT:	3000K
Input Voltage:	AC 100-277V 50/60 Hz
Power Factor:	>0.9
Efficacy:	100 lm/w
CRI:	>80
THD:	8.27%
Dimmable:	Yes
Dimensions:	2x4 ft, 603*1213 mm
Lifespan:	>50,000 Hrs
Beam Angle:	120°
Waterproof Rating:	IP40
Certificates:	UL, DLC, RoHS
Warranty:	5 years

### 4000K

<b>iGLO LED Panel Series:</b>	<b>GL72W2X4JI4000KUDX</b>
Wattage:	72W
Lumens:	8280 LM
CCT:	4000K
Input Voltage:	AC 100-277V 50/60 Hz
Power Factor:	>0.9
Efficacy:	115 lm/w
CRI:	>80
THD:	<15%
Dimmable:	Yes
Dimensions:	2x4 ft, 603*1213 mm
Lifespan:	>50,000 Hrs
Beam Angle:	120°
Waterproof Rating:	IP40
Certificates:	UL, DLC, RoHS
Warranty:	5 years

## PRODUCT SPECIFICATIONS

### 5000K

<b>iGLO LED Panel Series:</b>	<b>GL72W2X4JI5000KUDX</b>
Wattage:	72W
Lumens:	8568 LM
CCT:	5000K
Input Voltage:	AC 100-277V 50/60 Hz
Power Factor:	>0.9
Efficacy:	119 lm/w
CRI:	>80
THD:	<15%
Dimmable:	Yes
Dimensions:	2x4 ft, 603*1213 mm
Lifespan:	>50,000 Hrs
Beam Angle:	120°
Waterproof Rating:	IP40
Certificates:	UL, DLC, RoHS
Warranty:	5 years

Box Size	Qty/Carton	Gross Weight	Net Weight
1280*675*110 mm	2	15.6 kg/CTN	6.7 kg/PCS