

iGLO LED Tube Series - 18W & 22W

ENVIRONMENTALLY FRIENDLY, ENERGY EFFICIENT



Features

- ETL, FCC certificate
- 4ft, T8 Tube; Al. + PC tube with Frosted or Clear Lens
- 160° lighting, high CRI.
- input voltage AC100-277V
- Energy saving up to 70%
- Eco-Friendly, no UV or IR radiation, mercury free
- 50,000 Hrs Lifetime


Applications

Warehouse, Garages, Factory Lighting,
Homes, Offices, Hotels, Hospitals,
Schools, Cafeterias, Grocery
& Shopping Centers, etc.



Frosted Lens

Clear Lens

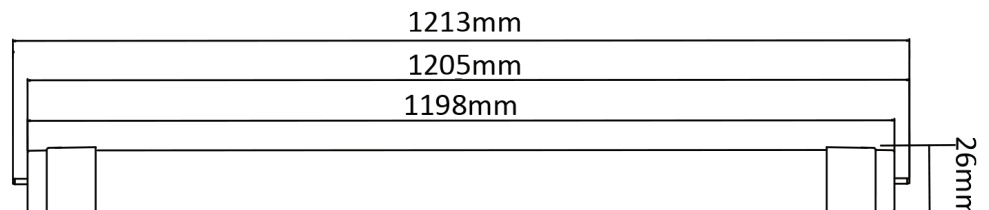


PRODUCT SPECIFICATIONS

iGLO LED T8 Tube Series:	GL18WT8BE5000KUDX1.2MC GL18WT8BE5000KUDX1.2MF	GL22WT8BE5000KUDX1.2MC GL22WT8BE5000KUDX1.2MF
Wattage:	18W	22W
Lumens:	2340 LM	2860 LM
CCT:	5000K	5000K
Input Voltage:	AC100-277V, 50-60Hz	AC100-277V, 50-60Hz
Power Factor:	≥0.9	≥0.9
Lens Type:	Clear and Frosted	Clear and Frosted
Efficacy:	130~160 lm/w	130~160 lm/w
CRI:	83Ra	83Ra
THD:	<20%	<20%
Dimmable:	No	No
Dimensions:	4 ft, T8	4 ft, T8
Lifespan:	50,000 Hrs	50,000 Hrs
Beam Angle:	160°	160°
Operation Temperature:	-20°C to 45°C	-20°C to 45°C
Housing:	Aluminum & Plastic	Aluminum & Plastic
Certificates:	ETL, FCC	ETL, FCC
Warranty:	3 years	3 years


Box Size	Qty/Carton	Gross Weight	Net Weight
1310*235*240 mm	25	10 kg/CTN	.32 kg/PCS

INSTALLATION

1. Turn off the power to the light fixture at the breaker panel before installation.
2. Open the diffuser from the light fixture.
3. Remove the fluorescent tubes. Please dispose of these items properly as they contain mercury.
4. Cut the wires shown as the diagram below.

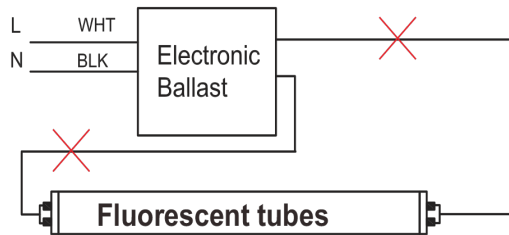

5. Make the new wire connect to branch circuit shown as the diagrams below.
6. Replace the cover the wiring channel.

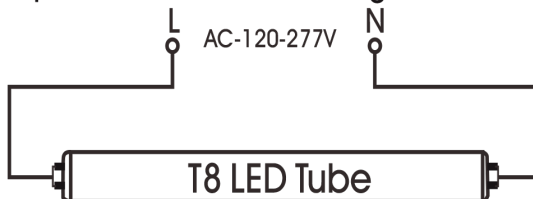

7. Install the LED tubes, close the diffuser.